



INDUSTRIAL PLUGS & SOCKETS SS - TYPE



BCH ELECTRIC LIMITED
we care for you



Industrial Plugs & Sockets

OFF-LOAD Decontactor - SS Type

BCH Industrial Plugs and Sockets (off-load Decontactors) combine simplicity, convenience and reliability. Their unique design makes use of the concept of spring-loaded butt-type contacts, instead of the conventional concept of pin-and-sleeve type.

BIL Industrial Plugs and Sockets are available in several contact combinations both for power as well as control circuits. They have advantages like positive, bayonet-type fitting between plugs and sockets, shrouding of live parts from accidental human touch, reliable earthing through butt-type silver-tipped contact. They are suitable for outdoor applications and for use under conditions of high vibrations. Plugs and sockets up to 5 pins for power circuit are rated for 30A at 500V and those meant for use on control circuits, up to 12 pins, have ratings of 12A at 500V.

Butt-type silver contacts

- Pre-determined optimum contact pressure for high conductivity.
- Low contact-resistance-low temperature-rise.
- Infinite plug interchangeability with consistent contact pressure i.e. no difference in contact-pressure with new or old plugs.
- Non-deteriorating contact carrying surface.
- Self aligning, self wiping contacts i.e. contacts wipe and align when the plug has been fully inserted.
- Reliability of silver contacts unaffected in high temperature conditions.

Interchangeability of interiors

The interiors of Plugs and sockets are interchangeable and are retained by cir - clips. The easy interchangeability enables many different arrangements to be made up from a minimum stock of components.

Earthing

The earth contact is always in the central position thus eliminating the possibility of inadvertently connecting a live contact to earth. It is also impossible to lodge or wedge bare conductors in the socket to obtain a supply.

Socket cover

The socket is fitted with a strong spring closed gasketed cover making the unit suitable for outdoor use.

Self Locking design

The plug cannot be pulled out of the socket by its cable or fall out on its own due to positive bayonet type fitting.







Electrical and Mechanical Ratings

PARAMETER	PLUGS AND SOCKETS FOR USE ON POWER CIRCUITS	PLUGS AND SOCKETS FOR USE ON CONTROL CIRCUITS
Contact options	2P + E 1P + E + N 3P + E 3P + E + N	Upto 12 contacts
Rated voltage	500V AC and DC	500V AC and DC
Thermal current (Ith)	30A (Copper cable) 20A (Alum. Cable)	12A (Copper cable) 8A (Alum. Cable)
Contact resistance	Less than 1m ohm	Less than 1m ohm
Contact pressure	1.2 kg. (min.) 1.35 kg. (max.)	1 kg. (min.) 1.15 kg. (max.)
Mechanical and electrical life	10,000 operations	10,000 operations
Conduit entry	3/4" dia	3/4" dia
Terminal capacity	6mm ²	1.5mm ²
Terminations	Spring loaded	Solder type

Approvals

- Electronics Components Standardisation Organisation, Ministry of Defence, Bangalore, as per JSS 508 19.
- Nirikshan Niyantanalaya (Vahan), Ahmednagar, for application on Vehicles and Trailors
- Central Machine Tools Institute, Bangalore, as per IEC: 309A

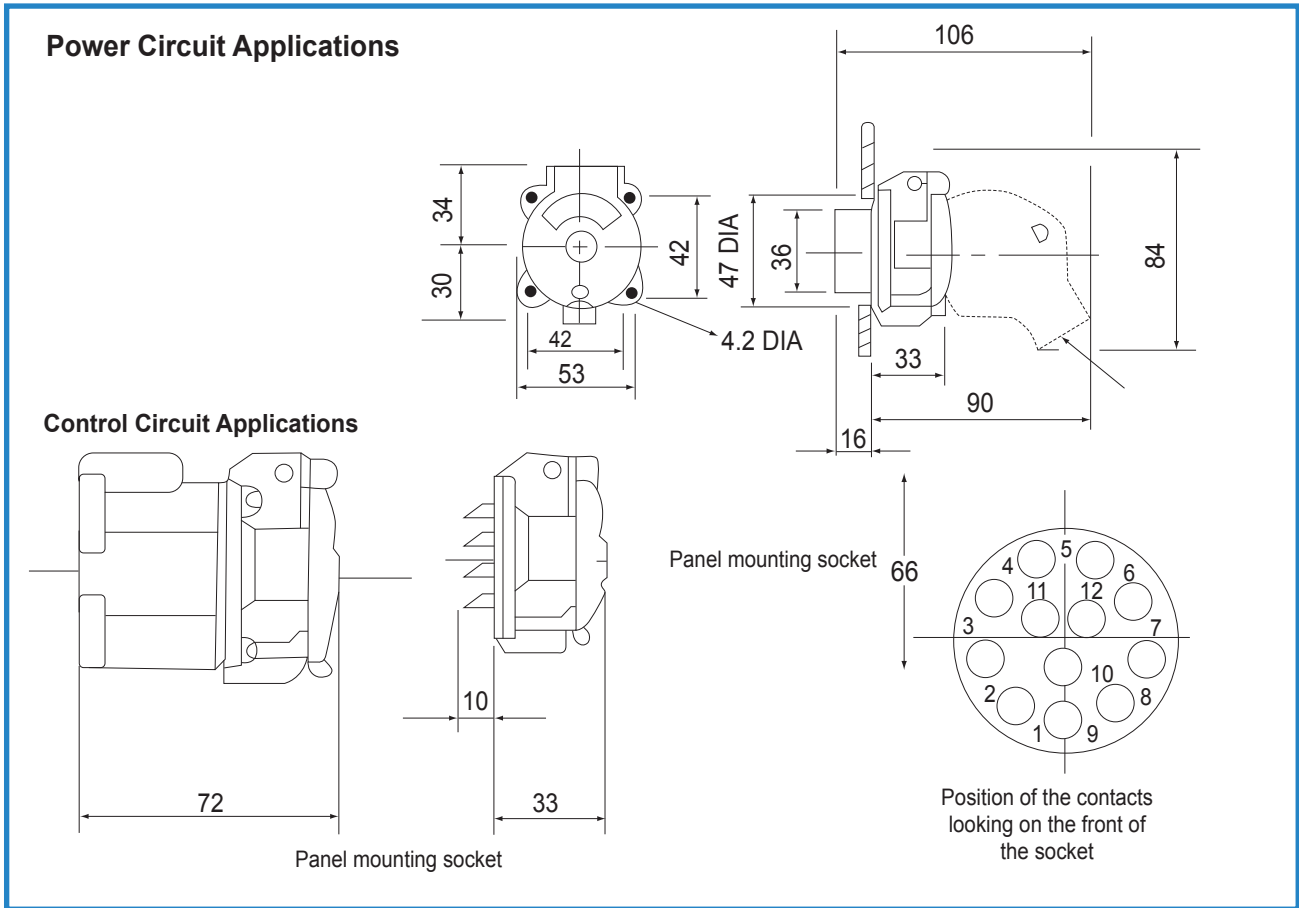
Selection chart

POWER CIRCUIT APPLICATIONS	CATALOGUE CODE			
Contact options	2P+E*	1P+N+E	3P+E	3P+N+E
Position contacts				
Panel mounting socket		2415B	2413B	2417B
Plug with inclined handle		215B	213B	217B

POWER CIRCUIT APPLICATIONS	CATALOGUE CODE	
No. of contacts	Panel mounting socket	Plug with inclined handle
12	2499/12	299/12B

* Available on request

Dimensions(mm)



BCH ELECTRIC LIMITED

Visit us at : www.bchindia.com

Corporate Office : 1105, New Delhi House, 27, Barakhamba Road, New Delhi - 110 001 Tel. : 91-11-23316029/3610/6539 Fax : 91-11-23715249 E-Mail : marketing@bchindia.com
Registered Office : Block 1E, 216, Acharya Jagadish Chandra Bose Road, Kolkata - 700 017
Works : 20/4, Mathura Road, Faridabad - 121 006 (Haryana) Tel. : 0129-4063000/4061026 Fax : 0129-2304024

Sales Offices :

Ahmedabad

93, City Centre,
Near Swastik Char Rasta,
C.G.Road, Navrangpura,
Ahmedabad - 380 009
Tel.: (079) 26565719, 26565728
Mobile: 98256-07601
Fax : (079) 26561210
E-mail: ahmedabad@bchindia.com

Bangalore

B.M.H. Complex, IInd Floor,
No. 22, Kengal Hanumanthiah Road,
Bangalore - 560 027
Tel. : 080-22273478, 41144878, 41144879
Mobile : 98455-46105
Fax : 080-22236759
E-mail : bangalore@bchindia.com

Bhubaneswar

Plot No. 4708/1,
Gajapati Nagar,
Bhubaneswar - 750 005
Tel. : 0674-2301767
Mobile : 98610-81767
E-mail: bhubaneswar@bchindia.com

Chandigarh

SCO 121-22-23, Ist Floor,
Sector 34-A, Chandigarh - 160 022
Tel. : 0172-5078957
Mobile : 98554-87089
E-mail : chandigarh@bchindia.com

Chennai

LVR CENTRE, 3rd Floor
No. 7, Seshadri Road,
Alwarpet, Chennai - 600 018
Tel. : 044-24997042, 24997002
Mobile : 98402-85500
Fax : 044-24996853
E-mail : chennai@bchindia.com

Cochin

2nd Floor, 32/1495
B-1, Chakos Chambers,
By Pass Junction,
Cochin - 682 025
Tel.: 0484-6593697
Mobile : 98802-90473
E-mail: cochin@bchindia.com

Coimbatore

87, Dr. Nanjappa Road,
Coimbatore - 641 018
Tel. : 0422-2305311
Mobile : 98430-53555
Fax : 0422-2302599
E-mail : coimbatore@bchindia.com

Faridabad

110 & 117, Om Shubham Tower
Neelam Bata Road, N.I.T,
Faridabad - 121 001 (Haryana)
Mobile : 98180-10700
E-mail : faridabad@bchindia.com

Gurgaon

SF-203, Navkriti Arcade
Block-A, Sushant Lok, Phase-I
Gurgaon - 122 001 (Haryana)
Mobile : 99101-55464
E-mail : gurgaon@bchindia.com

Guwahati

2nd Floor, Maya Ville,
Borthakur Mill Road, Ulubari
Guwahati - 781 0007
Mobile : 09435407024
E-mail : guwahati@bchindia.com

Hospet

940C, Third Cross
Third Ward, Patel Nagar
Station Road,
Hospet-583201
Tel: 09845930782
Email: hospet@bchindia.com

Hubli

A-5, Navaniketan Apartments
Ashok Nagar
Hubli (Karnataka)
Tel. : 0836-3090472
Mobile No. 98802-90471
Email: hubli@bchindia.com

Hyderabad

210, Prajya Corporate House,
1-10-63&64, Chikoti Garden,
Begumpet, Hyderabad - 500 016
Tel. : 040-66206263/27763325
Mobile : 98493-99240
Fax : 040-66207273
E-mail : hyderabad@bchindia.com

Indore

330-331, Indraprastha Tower,
6, MG Road, Indore - 452 001
Tel. : 0731-2510011
Mobile : 98266-66091
E-mail : indore@bchindia.com

Jaipur

25, Hathroi, Gopalbari,
Jaipur - 302 001
Tel. : 0141-5104521
Mobile : 98290-10813
Fax : 0141-2363521
E-mail : jaipur@bchindia.com

Jamshedpur

3rd Floor, Aastha Trade Centre,
'Q' Road, Bistupur,
Jamshedpur - 831001
Tel. : 0657-6573507
Mobile : 98351-82109
Fax : 0657-2420439
E-mail : jamshedpur@bchindia.com

Kolkata

East India House,
3rd Floor, 20-B, Abdul Hamid
Street, Kolkata - 700 069
Tel. : 033-22138508 / 10
Mobile : 98303-36101
Fax : 033-22138512
E-mail : kolkata@bchindia.com

Lucknow

Madan Plaza, 3rd Floor,
14, Station Road, Lucknow
Tel. : 0522-402597/402597/402597
Mobile : 98399-12304
E-mail : lucknow@bchindia.com

Ludhiana

S.C.O - 18, IInd Floor,
Feroze Gandhi Market,
Ludhiana - 140 001
Tel. : 0161-5021807
Mobile : 98765-87088
Fax : 0161-2771807
E-mail : ludhiana@bchindia.com

Madurai

E 168/69, Santanam Road
TVS Nagar
Madurai-625003
Surat - 395 002
Tel: 09843133990
Email: maduri@bchindia.com

Mumbai

A-151, Mittal Tower,
Nariman Point,
Mumbai - 400 021
Tel. : 022-22822947/22826039
Mobile : 98923-00706
Fax : 022-22822858
E-mail : mumbai@bchindia.com

Nagpur

Block No. 238-B,
Opp. Dharamdas Darbar,
Nr. Choudhary Chowk, Jaripatka,
Nagpur, Maharashtra - 440 014
Tel. : 99701-80877
Mobile : 98351-82109
E-mail : nagpur@bchindia.com

New Delhi

801, Akash Deep,
26A, Barakhamba Road,
New Delhi - 110 001
Tel. : 011-23313878
Mobile : 98102-12502
Fax : 011-23739230
E-mail : delhi@bchindia.com

Pune

8, Sarosh Bhawan,
16-B/1, Dr. Ambedkar Road,
Pune - 411 001
Tel. : 020-26052590
Mobile : 98220-11086
Fax : 020-26135224
E-mail : pune@bchindia.com

Raipur

2nd Floor,
Building No- B- 234,
Indira Gandhi
Vyavasayik Parisar,
Pandri, Raipur - 492 004
Tel. : 0771-4020213
Mobile : 98266-66092
E-mail : raipur@bchindia.com

Surat

601/A, 21st Century Business Centre
Ring Road
Surat - 395 002
Mobile : 91 9825607617
E-mail : surat@bchindia.com

Trichy

Kingston Park,
Second Floor,
19/1, Puttur High Road,
Ramalinga Nagar,
Trichy - 620 003.
Mobile: 99406 76502
Email : trichy@bchindia.com

Vadodara

101, Toran Complex,
Vikas Nagar
Old Padra Road
Vadodara - 390 020.
Tel. : 0265-6548444
E-mail : baroda@bchindia.com

Vishakapatnam

Venu Vaibhavam, 2nd Floor,
Flat No, 201, Palace
Layout, Pedda Waltair,
Vishakapatnam - 530 017
Mobile : 98493-99238
E-mail : vizag@bchindia.com

Western UP & Uttarakhand

8, Cooperative Industrial Estate
Patel Nagar
Dehradun : 248001
Uttarakhand
Mobile : 9760005793
E-mail : dehradun@bchindia.com

Resident Engineers Locations Tel.

Agartala	94361-28939	Kolhapur	98906-26205	Kota	98290-14899	Mangalore	98457-31944	Tirupathi	98661-30930
Haldwani	99970-12643	Nashik	98900-12944	Navi Mumbai	98923-00701	Pondichery	98942-22033	Warangal	98495-51691
Kanpur	98392-34539	Salem	98433-19533	Silchar	94354-04033	Siliguri	98320-11433		
Muzaffarnagar	98970-73741	Udaipur	98292-44085	Vijayawada	98662-20504	Bhilai	98266-12907		
Renukoot	98399-55117	Bhopal	98266-66093	Baddi	93187-78975	Gwalior	98268-03658		
Ambala	93541-18839	Ghaziabad	98107-44937	Gorakhpur	98392-24988	Jodhpur	98292-18618		
Durgapur	97320-03364	Jabalpur	98268-03656	Jalandhar	98763-47188	Rajkot	98256-04709		

Since product improvement is a continuous process, the data furnished in this brochure may undergo revision without prior notice.